


Recess LED

- Very wide spacing.
- Save up to 2/3 of the number of fittings used.
- Energy savings, extra low standby power consumption.

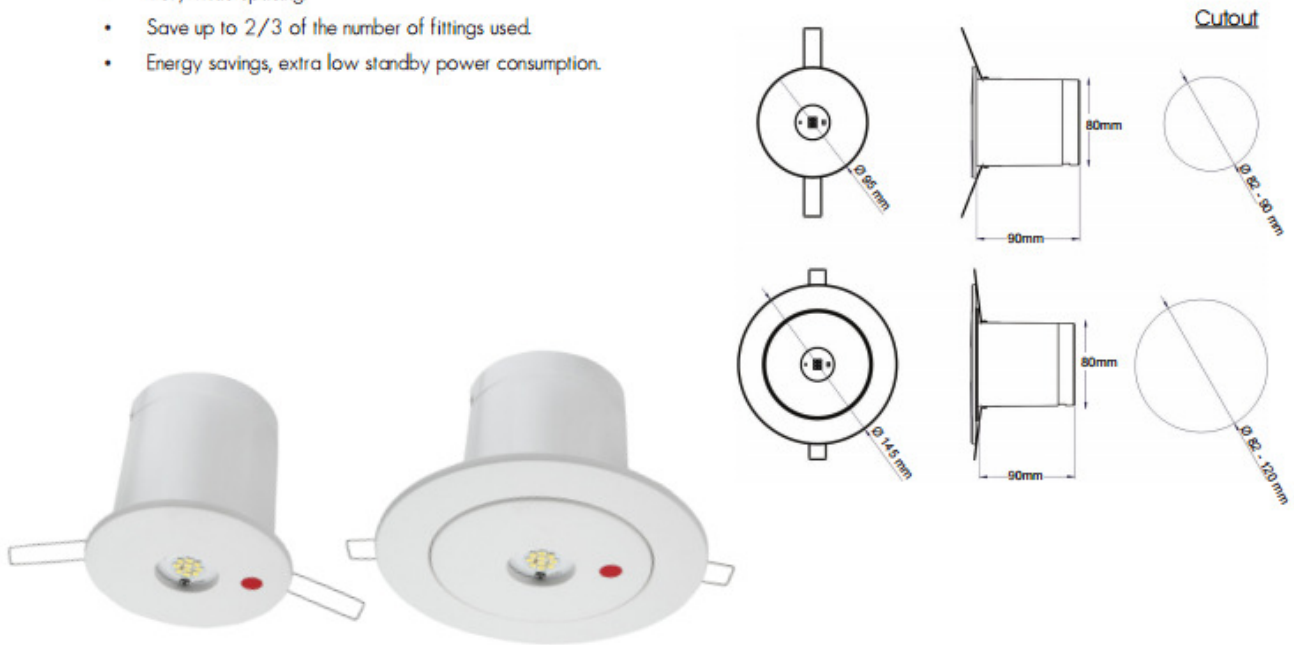

TECHNICAL SPECIFICATIONS

Model Number :	REL20NM-LED-CU	REL10NM-LED-CU
Mode of Operation :	Non-Maintained	
Lamp :	3W White LED	
Rated Duration :	2 Hours	3 Hours
Mains Supply :	220-240 Volts	
Mains Frequency :	50-60Hz	
Power Consumption :	< 1.5W	
Battery :	High Temperature Nickel Cadmium (NiCd)	
Charger :	Regulated variable rate	
Charge Monitor :	LED	
Test Facility :	Micro switch	
Safety Features :	Low battery voltage cut off to prevent over discharge	
Recharge Period :	< 24 Hours	
Fitting Construction :	Injection moulded with fire retardant (UL94), high impact material	
Weight :	Approximately 0.3 kg	Approximately 0.4 kg
Standards / Compliance :	IEC 60598-2-22, SS 263 Part 2, SS 563 IEC 61347-2-7, IEC 61347-2-13	
Approvals :	PSB Type test, PSB PLS (Product Listing Scheme)	



CLASS II



Type and batch tested with PSB PLS-LISTED LABEL



Ordering Guide:

Ordering Code

- REL10NM-LED-CU-95mm
- REL10NM-LED-CU-145mm
- REL20NM-LED-CU-95mm
- REL20NM-LED-CU-145mm