


Recess LED

- Very wide spacing, double of traditional 10W halogen.
- Save up to 2/3 of the number of fittings used.
- Energy savings, extra low standby power consumption.
- Slim casing, fit through 50mm hole.

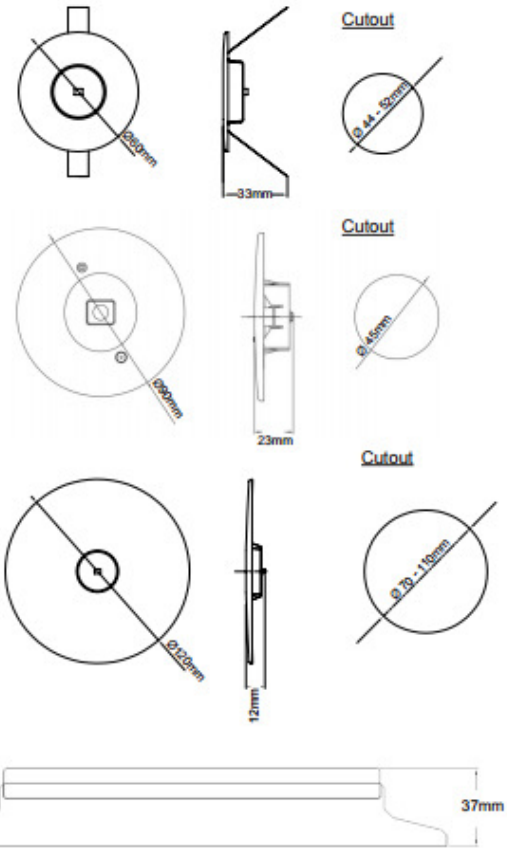

TECHNICAL SPECIFICATIONS

Model Number :

REL20NM-LED

Mode of Operation :	Non-Maintained
Lamp :	3.6V / White LED
Rated Duration :	2 Hours / 3 Hours
Mains Supply :	220-240 Volts
Mains Frequency :	50-60Hz
Power Consumption :	< 1.5W
Battery :	High Temperature Nickel Cadmium
Charger :	Regulated variable rate
Charge Monitor :	LED
Test Facility :	Micro switch
Safety Features :	Low battery voltage cut off to prevent over discharge
Recharge Period :	< 24 Hours
Fitting Construction :	Aluminum epoxy powder coated reflector Galvanised zinc coated charger housing
Weight :	Approximately 0.3 kg
Standards / Compliance :	IEC 60598-2-22, SS 263 Part 2, SS 563
Approvals :	TÜV SÜD PSB, PSB PLS (Product Listing Scheme)



CLASS I



PSB Singapore



Type and batch tested with PSB PLS-LISTED LABEL

Ordering Guide:

Ordering Code

REL20NM-LED-60MM

REL20NM-LED-90MM

REL20NM-LED-120MM