

T8-120

T8 LED tube

Description & Features

- Aluminum alloy 6063 base+PC cover.
- High quality Epistar LED chips, lower lumen decrease.
- Lumens efficiency more than 100lm/w for fixture, CRI>80Ra.
- No bad glare and stroboscopic, no flicker.
- Power factor greater than 0.95.
- Electric wave resistant, Instant start.
- Long life, L70>50,000 Hours.
- Professional technology support, can offer Dialux solution, IES.

Certificate

- CE, RoHs, ETL(No.4003956)

Specifications

Model No.:	T8-120-18W
Power Consumption:	18W
Input Voltage:	100-240V/277Vac
Operate Frequency:	50-60Hz
Lumens Output:	1900-2100lm
LED Q'ty:	96pcs
LED Brand	Epistar SMD2835
Color Temperature:	3000K, 4000K, 5000K, 6000K
CRI:	>80
Beam Angle:	140°
IP Rated:	IP40
Power Factor:	>0.95
Total Harmonic Distortion:	<20%
Working Temp.:	-20°C ~ 40°C
Storage Temp.:	-40°C ~ 70°C
Lifespan L70(H):	>50,000 Hours

Note 1: Different color LED light performance somewhat deviation, rate ≤ 5%


Milky Cover




Clear Cover



Light Distribution Curve

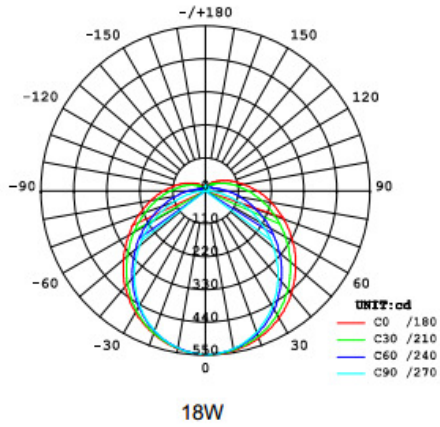

Illumination Distribution

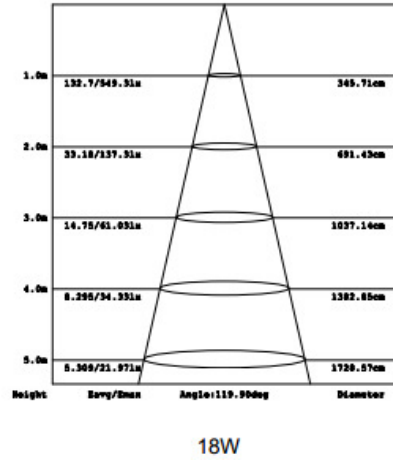

Dimensions

