




LED High Bay F Type


Model	Watt	LED Chip	Color Temp	Brightness (LM)	Beam Angle (Degree)	Input Voltage (V)	Life span	IP Rate	Typical CRI
LT-HBF-80F	80W	PHILIPS	5700K	>8800 lm	45/90/120°	100-277VAC 50-60Hz	> 50,000	IP65	> 80Ra
			4000K						
			2700K						
LT-HBF-100F	100W		5700K	>11000 lm					
			4000K						
			2700K						
LT-HBF-120F	120W		5700K	>13200 lm					
			4000K						
			2700K						
LT-HBF-150F	150W	5700K	>16500 lm						
		4000K							
		2700K							
LT-HBF-200F	200W	5700K	>22000 lm						
		4000K							
		2700K							
LT-HBF-250F	250W	5700K	>27500 lm						
		4000K							
		2700K							

80W HBF




4m	331.37cm		859.71lx
5m	414.21cm		550.21lx
6m	497.06cm		382.11lx
7m	579.90cm		280.71lx
8m	662.74cm		214.91lx
Height	Diameter	Angle 45 °	Lx

100W HBF




4m	953.40cm		346.1lx
5m	1191.75cm		221.5lx
6m	1430.10cm		153.8lx
7m	1668.46cm		113.0lx
8m	1906.81cm		86.53lx
Height	Diameter	Angle 120 °	Lx


120W HBF



4m	1142.52cm		392.2lx
6m	1713.78cm		174.8lx
8m	2285.04cm		95.31lx
10m	2856.30cm		62.92lx
12m	3427.56cm		43.69lx
Height	Diameter	Angle 120 °	Lx


150W HBF

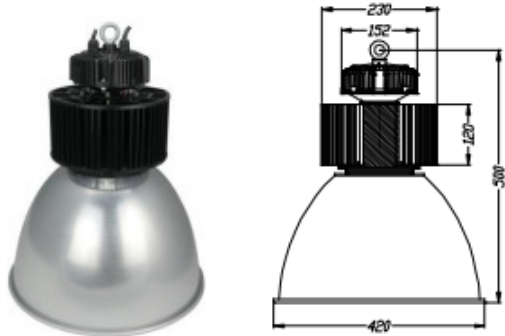


4m	331.37cm		1287lx
6m	497.06cm		572.21lx
8m	662.74cm		321.8lx
10m	828.43cm		206.0lx
12m	994.11cm		143.0lx
Height	Diameter	Angle 45 °	Lx


200W HBF



4m	331.37cm		1806lx
6m	497.06cm		802.81lx
8m	662.74cm		451.6lx
10m	828.43cm		289.01lx
12m	994.11cm		200.7lx
Height	Diameter	Angle 45 °	Lx

250W HBF

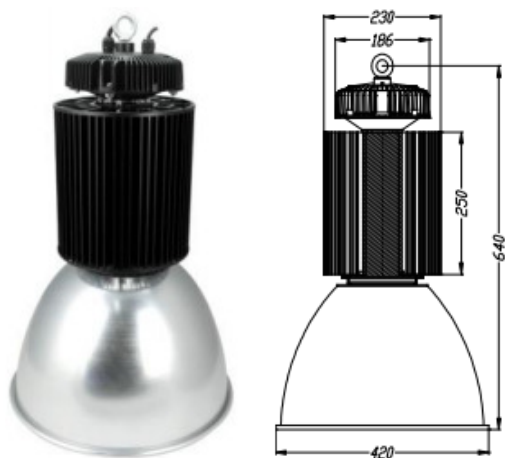

4m	331.37cm		2274lx
6m	497.06cm		1011lx
8m	662.74cm		568.5lx
10m	828.43cm		363.8lx
12m	994.11cm		252.7lx
Height	Diameter	Angle 45 °	Lx