



Model	Watt	LED Chip	Color Temp	Brightness (LM)	Beam Angle (Degree)	Input Voltage (V)	Life span	IP Rate	Typical CRI
LT-HBU-60	60W	PHILIPS	5700K	>9000 lm	90/120°	100-277VAC 50-60Hz	> 50,000	IP66	> 80Ra
			4000K						
			2700K						
LT-HBU-80	80W		5700K	>10400 lm					
			4000K						
			2700K						
LT-HBU-100	100W		5700K	>13000 lm					
			4000K						
			2700K						
LT-HBU-120	120W	5700K	>15600 lm						
		4000K							
		2700K							
LT-HBU-150	150W	5700K	>19500 lm						
		4000K							
		2700K							
LT-HBU-200	200W	5700K	>26000 lm						
		4000K							
		2700K							
LT-HBU-240	240W	5700K	>28800 lm						
		4000K							
		2700K							

60W UFO

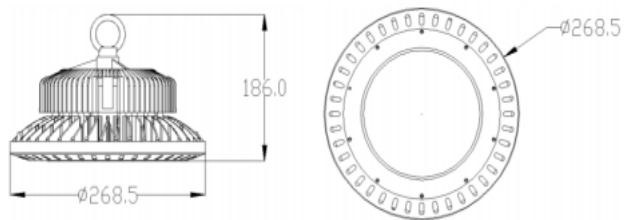


4m	801.11cm		241.1lx
5m	1001.39cm		154.31lx
6m	1201.67cm		107.2lx
8m	1602.23cm		60.28lx
10m	2002.79cm		38.58lx
Height	Diameter	Angle 90 °	Lx

80W UFO

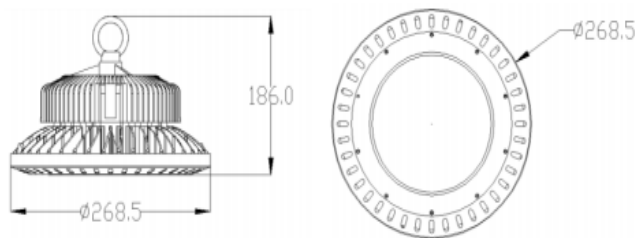


4m	782.20cm		339.21lx
5m	977.74cm		217.11lx
6m	1173.29cm		150.7lx
8m	1564.39cm		84.79lx
10m	1955.49cm		54.27lx
Height	Diameter	Angle 90 °	Lx

120W UFO

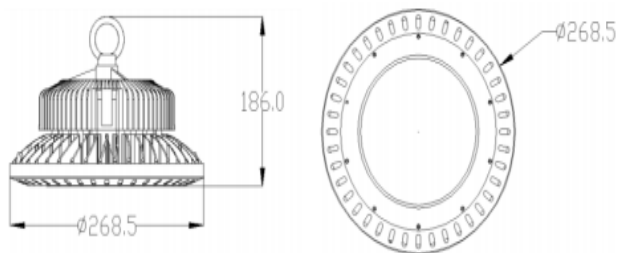


4m	787.12cm		424.41lx
5m	983.90cm		271.61lx
6m	1180.69cm		188.6lx
8m	1574.25cm		106.1lx
10m	1967.81cm		67.91lx
Height	Diameter	Angle 90 °	Lx

150W UFO

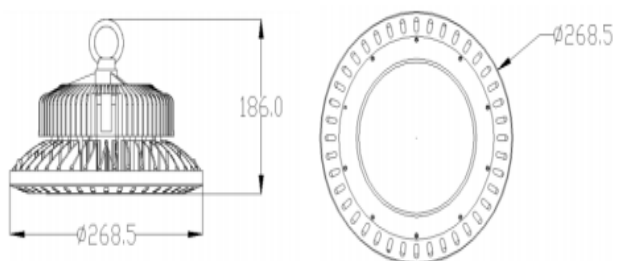


4m	787.12cm		638.4lx
5m	983.90cm		408.61lx
6m	1180.69cm		283.7lx
8m	1574.25cm		159.6lx
10m	1967.81cm		102.1lx
Height	Diameter	Angle 90 °	Lx

200W UFO

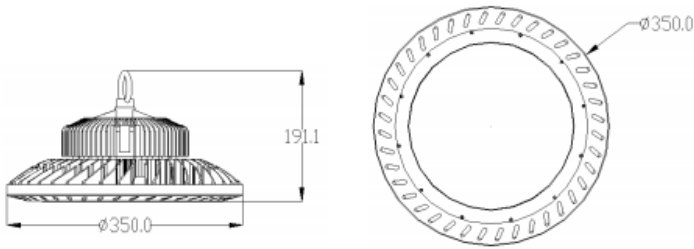

4m	803.63cm		898.1lx
5m	1004.54cm		574.8lx
6m	1205.45cm		399.1lx
8m	1607.27cm		224.49lx
10m	2009.09cm		133.1lx
Height	Diameter	Angle 90 °	Lx

240W UFO

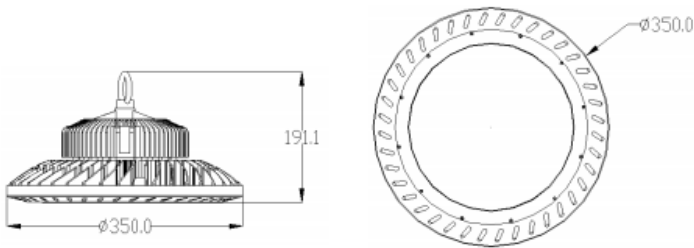

4m	803.63cm		983.3lx
5m	1004.54cm		629.3lx
6m	1205.45cm		437.0lx
8m	1607.27cm		245.8lx
10m	2009.09cm		157.3lx
Height	Diameter	Angle 90 °	Lx